

2020
TRAILERING GUIDE



WE'VE GENERATED QUITE A FOLLOWING



Every GMC is a reminder that the same passion and purpose that drive you also drive us. Together, we're setting our own standards and proving that Professional Grade isn't merely a label, it's a way of life. What follows are the capabilities of the entire GMC lineup that make us all pros.

This guide will help you select the GMC model that's right for your trailering needs. It also contains helpful tips for loading, driving and parking with your trailer.


Pro tip: Hover over key words to reveal hyperlinks. Clicking these will allow you to quickly navigate through the guide.

TABLE OF CONTENTS

MAXIMUM TRAILER WEIGHT RATING	1	TERRAIN	32
SIERRA HEAVY DUTY	2	OVERVIEW	33
OVERVIEW	3	TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS	34
TRAILERING CAPABILITY	4	VEHICLE DIMENSIONS	35
TRAILERING CAPABILITY (10,000-LB GVWR OR LESS)	5	SAVANA	36
POWERTRAIN SPECIFICATIONS	6	CARGO VAN OVERVIEW	37
VEHICLE DIMENSIONS	7	CARGO VAN TRAILERING CAPABILITY	38
CHASSIS CAB OVERVIEW	8	PASSENGER VAN OVERVIEW	39
CHASSIS CAB TRAILERING CAPABILITY	9	PASSENGER VAN TRAILERING CAPABILITY	40
CHASSIS CAB VEHICLE DIMENSIONS	10	CARGO/PASSENGER VANS POWERTRAIN SPECIFICATIONS	41
SIERRA 1500	11	CUTAWAY OVERVIEW	42
OVERVIEW	12	CUTAWAY TRAILERING CAPABILITY	43
TRAILERING CAPABILITY	13	CUTAWAY POWERTRAIN SPECIFICATIONS	44
POWERTRAIN SPECIFICATIONS	15	VEHICLE DIMENSIONS	45
VEHICLE DIMENSIONS	16	TRAILERING TECHNOLOGY	46
CANYON	17	CAMERA SYSTEM	47
OVERVIEW	18	HIGHLIGHTS	48
TRAILERING CAPABILITY	19	AVAILABILITY	49
POWERTRAIN SPECIFICATIONS	20	TRAILERING TERMINOLOGY	50
VEHICLE DIMENSIONS	21	TRAILER HITCH TYPES	51
YUKON AND YUKON XL	22	TRAILER TYPES	52
OVERVIEW	23	TRAILERING INFORMATION LABEL	53
TRAILERING CAPABILITY	24		
POWERTRAIN SPECIFICATIONS	25		
VEHICLE DIMENSIONS	26		
ACADIA	27		
OVERVIEW	28		
TRAILERING CAPABILITY	29		
POWERTRAIN SPECIFICATIONS	30		
VEHICLE DIMENSIONS	31		

VEHICLE COMPARISON

MAXIMUM TRAILER WEIGHT RATING (LBS)¹

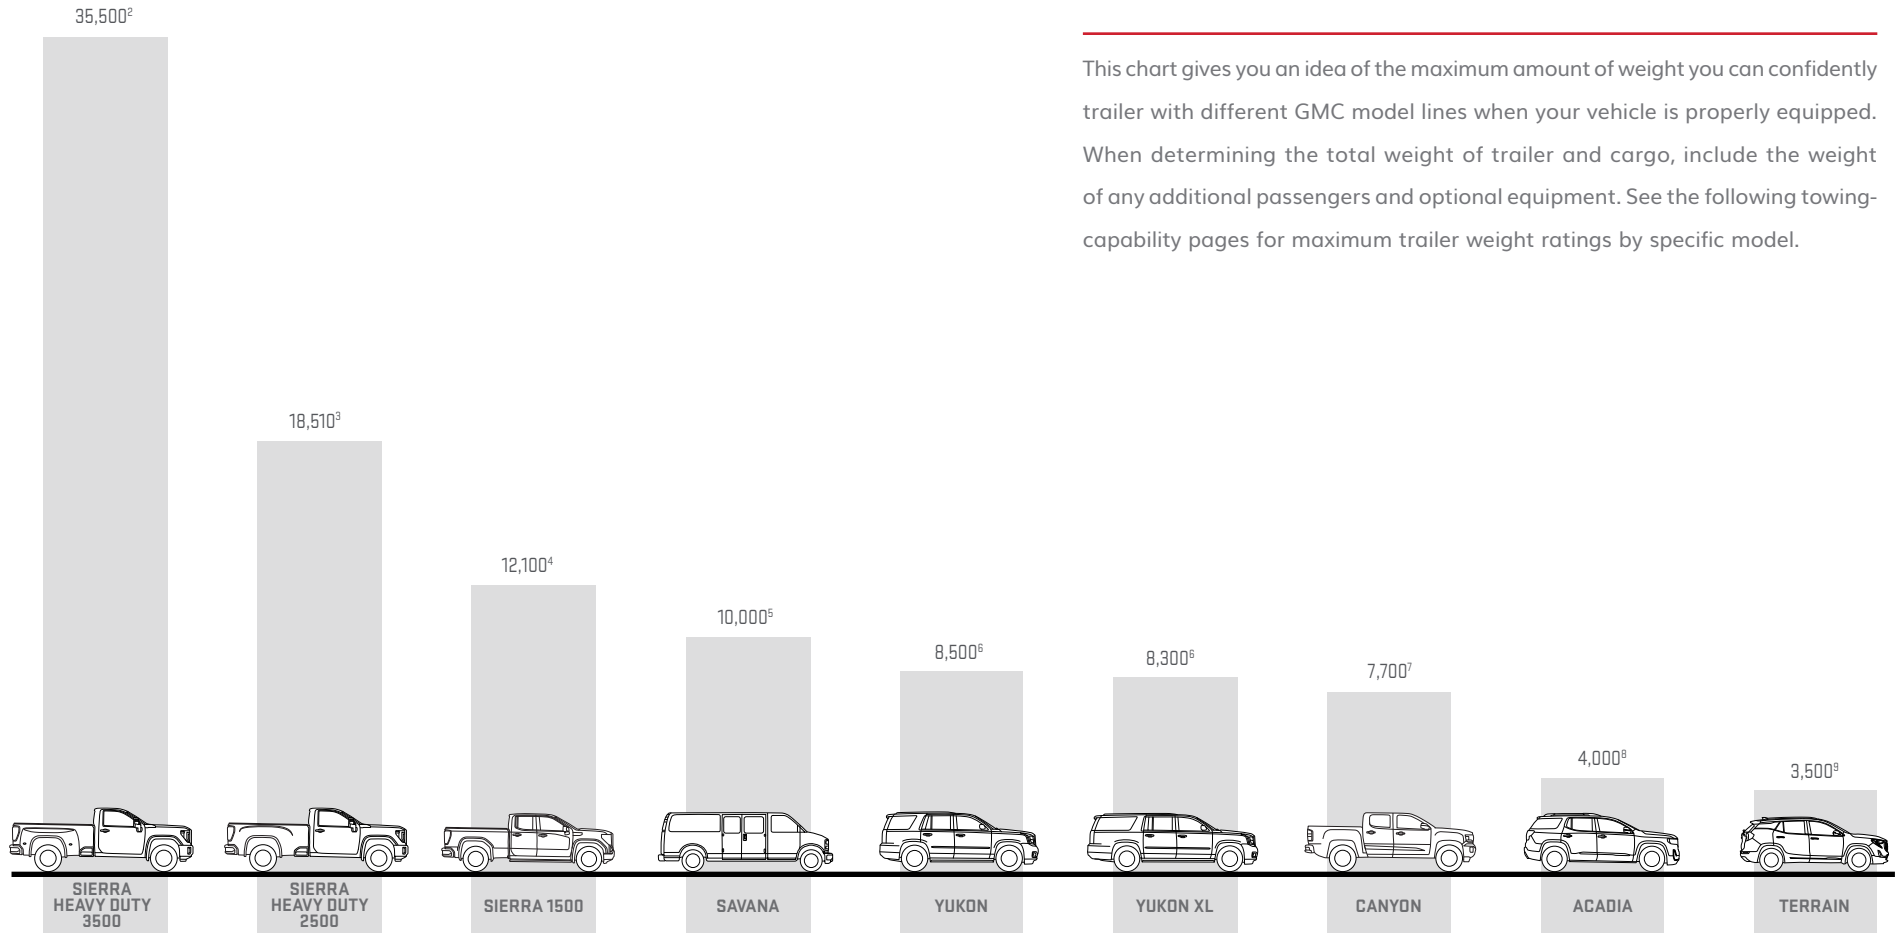

This chart gives you an idea of the maximum amount of weight you can confidently trailer with different GMC model lines when your vehicle is properly equipped. When determining the total weight of trailer and cargo, include the weight of any additional passengers and optional equipment. See the following towing-capability pages for maximum trailer weight ratings by specific model.

¹Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²35,500-lb rating requires a properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. ³18,510-lb rating requires a properly equipped 2500 HD Regular Cab long bed 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel or gooseneck hitch. ⁴Sierra's 12,100-lb rating requires a properly equipped Sierra SLT Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. ⁵10,000-lb rating requires a properly equipped Savana Cargo Van model with available 6.0L V8 engine and Trailering Equipment Package. ⁶Requires 2WD model with available Heavy-Duty Trailering Package. ⁷7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. ⁸Requires available 3.6L V6 engine and Trailering Package. ⁹Requires available 2.0L engine and trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 2

2020 SIERRA HEAVY DUTY



OVERVIEW

NEXT GENERATION SIERRA HEAVY DUTY



KEY TRAILERING FEATURES

- HEAVY-DUTY TRAILERING, UP TO 35,500 LBS¹ (MAX TRAILERING AS SHOWN 21,300 LBS²)
- FIRST HEAVY-DUTY PICKUP IN ITS CLASS WITH AN AVAILABLE ALLISON® 10-SPEED AUTOMATIC TRANSMISSION
- UP TO 15 AVAILABLE CAMERA VIEWS³ INCLUDING INDUSTRY-FIRST TRANSPARENT TRAILER VIEW
- AVAILABLE PROGRADE™ TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP⁴
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/HAUL MODE
- SMART TRAILER INTEGRATION
- AVAILABLE HEAD-UP DISPLAY AND REAR CAMERA MIRROR⁵
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO™ TAILGATE

KEY SPECIFICATIONS

- MAXIMUM GOOSENECK TRAILERING 35,500 LBS¹
- MAXIMUM FIFTH-WHEEL TRAILERING 32,000 LBS⁶
- MAXIMUM CONVENTIONAL TRAILERING 20,000 LBS⁷
- MAXIMUM HORSEPOWER 445⁸
- MAXIMUM TORQUE 910 LB-FT⁸
- MAXIMUM PAYLOAD 7,442 LBS⁹
- MAXIMUM CARGO BED VOLUME 83.5 CU. FT.¹⁰
- 12 CARGO TIE-DOWNS RATED AT 500 LBS¹¹ PER CORNER
- MAXIMUM SEATING CAPACITY OF SIX¹²

POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW 6.6L GAS V8 ENGINE PAIRED WITH 6L90 6-SPEED AUTOMATIC TRANSMISSION

¹35,500-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires properly equipped 3500 HD Crew Cab SRW standard bed 4WD model with available 6.6L Duramax Turbo Diesel and fifth-wheel or gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. ⁴App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ⁵Read the vehicle Owner's Manual for important feature limitations and information. ⁶32,000-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁷Requires properly equipped 3500 HD Crew Cab model with available 6.6L Duramax Turbo Diesel engine. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁸Requires available 6.6L Duramax Turbo Diesel engine. ⁹Requires properly equipped 3500 HD Regular Cab DRW long bed 2WD model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ¹⁰Requires long bed model. Cargo and load capacity limited by weight and distribution. ¹¹Cargo and load capacity limited by weight and distribution. ¹²Requires Double Cab or Crew Cab model with front 40/20/40 bench seat.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

NEXT GENERATION SIERRA HEAVY DUTY

DURAMAX TURBO DIESEL SPECIFICATIONS								GAS ENGINE SPECIFICATIONS							
Model	Cab	Bed	Max GCWR (lbs) ¹	Max Conventional Hitch (lbs) ²	Max Fifth-Wheel Hitch (lbs) ²	Max Gooseneck Hitch (lbs) ²	Max Payload (lbs) ³	Model	Cab	Bed	Max GCWR (lbs) ¹	Max Conventional Hitch (lbs) ²	Max Fifth-Wheel Hitch (lbs) ²	Max Gooseneck Hitch (lbs) ²	Max Payload (lbs) ³
2500	Reg 2WD	Long	26,000	14,500	18,510	18,510	3,715	2500	Reg 2WD	Long	24,000	14,500	17,370	17,370	3,979
	Reg 4WD	Long	26,000	14,500	18,190	18,190	3,650		Reg 4WD	Long	24,000	14,500	17,060	17,060	3,965
	Double 2WD	Standard	26,000	14,500	18,200	18,200	3,561		Double 2WD	Standard	24,000	14,500	17,050	17,050	3,762
	Double 4WD	Standard	26,000	14,500	17,890	17,890	3,546		Double 4WD	Standard	24,000	14,500	16,740	16,740	3,747
	Double 2WD	Long	26,000	14,500	18,040	18,040	3,595		Double 2WD	Long	24,000	14,500	16,930	16,930	3,792
	Double 4WD	Long	26,000	14,500	17,750	17,750	3,657		Double 4WD	Long	24,000	14,500	16,650	16,650	3,854
	Crew 2WD	Standard	27,500	18,500	18,500	18,500	3,553		Crew 2WD	Standard	24,000	14,500	16,940	16,940	3,751
	Crew 4WD	Standard	27,500	18,500	18,500	18,500	3,563		Crew 4WD	Standard	24,000	14,500	16,650	16,650	3,760
	Crew 2WD	Long	27,500	18,500	18,500	18,500	3,536		Crew 2WD	Long	24,000	14,500	16,840	16,840	3,800
Crew 4WD	Long	27,500	18,500	18,500	18,500	3,597	Crew 4WD	Long	24,000	14,500	16,550	16,550	3,862		
3500 SRW	Reg 2WD	Long	29,700	14,500	21,500	21,500	4,215	3500 SRW	Reg 2WD	Long	24,000	14,500	17,200	17,200	4,481
	Reg 4WD	Long	29,700	14,500	21,500	21,500	4,217		Reg 4WD	Long	24,000	14,500	16,950	16,950	4,534
	Double 2WD	Long	29,700	14,500	21,490	21,490	4,130		Double 2WD	Long	24,000	14,500	16,700	16,700	4,373
	Double 4WD	Long	29,700	14,500	21,210	21,210	4,148		Double 4WD	Long	24,000	14,500	16,500	16,500	4,391
	Crew 2WD	Standard	29,700	20,000	21,500	21,500	4,135		Crew 2WD	Standard	24,000	14,500	16,700	16,700	4,316
	Crew 4WD	Standard	29,700	20,000	21,300	21,300	4,185		Crew 4WD	Standard	24,000	14,500	16,530	16,530	4,365
	Crew 2WD	Long	29,700	20,000	21,330	21,330	4,013		Crew 2WD	Long	24,000	14,500	16,700	16,700	4,333
	Crew 4WD	Long	29,700	20,000	21,040	21,040	4,078		Crew 4WD	Long	24,000	14,500	16,410	16,410	4,398
3500 DRW	Reg 2WD	Long	43,500	20,000	32,000	35,500	6,532	3500 DRW	Reg 2WD	Long	24,000	16,800	16,800	16,800	7,442
	Reg 4WD	Long	40,000	20,000	31,760	31,760	6,196		Reg 4WD	Long	24,000	16,800	16,710	16,710	7,145
	Double 2WD	Long	40,000	20,000	31,500	31,500	6,059		Double 2WD	Long	24,000	16,400	16,400	16,400	6,985
	Double 4WD	Long	40,000	20,000	31,340	31,340	5,777		Double 4WD	Long	24,000	16,390	16,270	16,270	6,703
	Crew 2WD	Long	40,000	20,000	31,400	31,400	5,892		Crew 2WD	Long	24,000	16,300	16,200	16,200	6,894
	Crew 4WD	Long	40,000	20,000	31,180	31,180	5,607		Crew 4WD	Long	24,000	16,300	16,180	16,180	6,610

¹Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ²Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY (10,000-LB GVWR OR LESS)

NEXT GENERATION SIERRA HEAVY DUTY

SPECIFICATIONS									
Model	Cab	Bed	Max GVWR (lbs) ¹	Max GCWR ² (lbs) ²	Max Conventional Hitch (lbs) ³	Max Fifth-Wheel Hitch (lbs) ³	Max Gooseneck Hitch (lbs) ³	Max Payload (lbs) ⁴	
6.6L V8 Duramax Turbo Diesel									
2500	Double 4WD	Standard	10,000	24,500	14,500	12,610	12,610	2,375	
2500	Double 4WD	Long	10,000	24,500	14,500	11,690	11,690	2,236	
2500	Crew 4WD with 17" wheels	Standard	10,000	26,000	14,500	11,720	11,720	2,241	
2500	Crew 4WD with 18" or 20" wheels	Standard	10,000	26,000	17,850	11,530	11,530	2,213	
2500	Crew 2WD with 17" wheels	Long	10,000	26,000	14,500	12,550	12,550	2,365	
2500	Crew 2WD with 18" or 20" wheels	Long	10,000	26,000	17,970	12,350	12,350	2,336	
2500	Crew 4WD with 17" wheels	Long	10,000	26,000	14,500	10,620	10,620	2,076	
2500	Crew 4WD with 18" or 20" wheels	Long	10,000	26,000	16,560	10,240	10,240	2,047	
6.6L Gas V8 Engine									
2500	Regular 2WD	Long	9,900	24,000	14,500	17,370	17,370	3,757	
2500	Regular 4WD	Long	10,000	24,000	14,500	17,060	17,060	3,544	
2500	Double 2WD	Standard	10,000	24,000	14,500	17,050	17,050	3,541	
2500	Double 4WD	Standard	10,000	24,000	14,500	16,740	16,740	3,226	
2500	Double 2WD	Long	10,000	24,000	14,500	16,930	16,930	3,420	
2500	Double 4WD	Long	10,000	24,000	14,500	16,650	16,650	3,133	
2500	Crew 2WD	Standard	10,000	24,000	14,500	16,940	16,940	3,429	
2500	Crew 4WD	Standard	10,000	24,000	14,500	16,650	16,650	3,139	
2500	Crew 2WD	Long	10,000	24,000	14,500	16,840	16,840	3,329	
2500	Crew 4WD	Long	10,000	24,000	14,500	16,550	16,550	3,040	

The Gross Vehicle Weight Rating (GVWR) and Gross Combined Weight Rating (GCWR) of the Sierra Heavy Duty have increased for 2020. For small businesses and commercial buyers, this change has potential implications for registering your truck.

- Trucks over 10,000 lbs GVWR require a Department of Transportation number.
- Drivers of trucks over 26,000 lbs GCWR also require a Commercial Driver's License.

Contact the U.S. Department of Transportation and your local Department of Transportation to determine whether you may have additional registration or licensing requirements for these trucks.

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

NEXT GENERATION SIERRA HEAVY DUTY



ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
6.6L V8 Turbo Diesel	4.05 x 3.89 / 103 x 99	Cast iron	Cast aluminum	16 : 1	Overhead valve, four valves per cylinder	Common-rail direct fuel injection	445 @ 2800	910 @ 1600
6.6L Gas V8	4.06 x 3.86 / 103.25 x 98	Cast iron with nodular iron main caps	Cast aluminum	10.75 : 1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct fuel injection	401 @ 5200	464 @ 4000

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio
Allison 10-speed automatic (6.6L Turbo Diesel)	10L1000	4.54	2.87	2.06	1.72	1.48	1.26	1.00	0.85	0.69	0.63	4.54	3.42 (6.6L Turbo Diesel)
6L90 6-speed automatic (6.6L gas V8)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	-	-	-	-	3.06	3.73 (6.6L gas V8)



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

NEXT GENERATION SIERRA HEAVY DUTY

SELECT SIERRA 2500 HEAVY DUTY CAB DIMENSIONS

CREW CAB

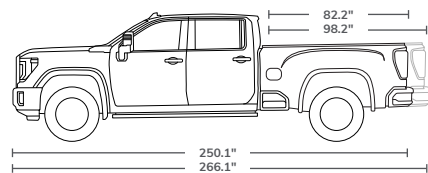


79.7\"-79.8\"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Crew Cab models with a 6' 9\" standard bed or available 8' long bed.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	10.1"
WHEELBASE	CARGO VOLUME
158.9\"-172"	69.6-83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
68.1\"/68.3"	

CREW CAB

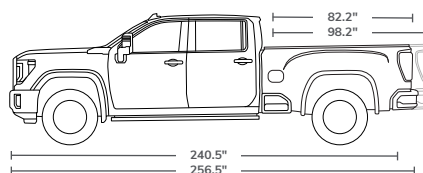


78.8\"-80"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Crew Cab models with either a 6' 9\" standard bed or available 8' long bed. Long bed is available with a SRW or DRW configuration.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	SRW: 11.1\"-11.2\" DRW: 10.4"
WHEELBASE	CARGO VOLUME
158.9\"-172"	69.6-83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

DOUBLE CAB

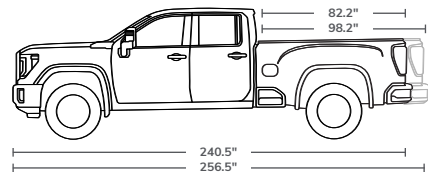


79.8\"-80"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Double Cab models with a 6' 9\" standard bed or available 8' long bed.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	10.2"
WHEELBASE	CARGO VOLUME
149.4\"-162.5"	69.6-83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
68.1\"/68.3"	

DOUBLE CAB

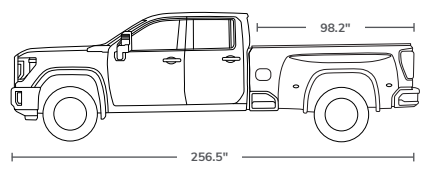


80.2\"-80.9"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Double Cab models with an 8' long bed SRW or DRW configuration.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	SRW: 11.2\" DRW: 10.4"
WHEELBASE	CARGO VOLUME
162.5"	83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

REGULAR CAB

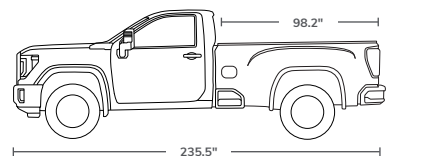


80"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	10.2"
WHEELBASE	CARGO VOLUME
141.6"	83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
68.1\"/68.3"	

REGULAR CAB

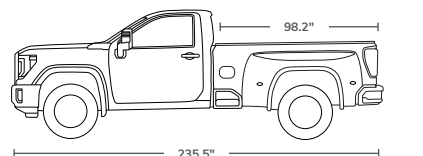

80.2\"-80.9"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed SRW or DRW configuration.

INSIDE BED HEIGHT	GROUND CLEARANCE
21"	SRW: 11.2\" DRW: 10.5"
WHEELBASE	CARGO VOLUME
141.6"	83.5 cu. ft. ¹
FRONT/REAR TREAD WIDTH	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

¹Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

OVERVIEW

NEXT GENERATION 2020 SIERRA HEAVY DUTY CHASSIS CAB



KEY FEATURES

- STANDARD TRAILERING MIRRORS
- ELECTRIC PARKING BRAKE
- NEW PARK GRADE HOLD ASSIST
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- HILL START ASSIST

AVAILABLE CUSTOM UPFITS

- DUMP TRUCK
- FLAT BED
- UTILITY/SERVICE BODY
- PLATFORM/STAKE BODY
- SNOWPLOW/SPREADER
- AMBULANCE/RESCUE



KEY SPECIFICATIONS

- MAXIMUM HORSEPOWER 445¹
- MAXIMUM TORQUE 910 LB-FT¹
- MAXIMUM PAYLOAD 7,571 LBS²
- MAXIMUM GVWR 14,000 LBS³
- MAXIMUM GCWR 40,000 LBS⁴
- MAXIMUM FUEL TANK CAPACITY 63.5 GALLONS (APPROX.)

POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW STANDARD 6.6L GAS V8 ENGINE WITH HYDRA-MATIC 6L90 6-SPEED AUTOMATIC TRANSMISSION

¹Requires available 6.6L Duramax Turbo Diesel engine. ²Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ³Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ⁴40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

NEXT GENERATION SIERRA HEAVY DUTY CHASSIS CAB

SPECIFICATIONS

Cab	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio (lbs)	Max Payload (lbs) ³
Regular	6.6L Gas V8				
	2WD Regular Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,571
	4WD Regular Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,204
	2WD Regular Cab Dual Rear Wheel (84" CA)	14,000	24,000	3.73	7,454
	4WD Regular Cab Dual Rear Wheel (84" CA)	14,000	24,000	3.73	7,159
	6.6L Duramax Turbo Diesel V8				
	2WD Regular Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,638
	4WD Regular Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,271
Crew	6.6L Gas V8				
	2WD Crew Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,040
	4WD Crew Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	6,713
	6.6L Duramax Turbo Diesel V8				
	2WD Crew Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,078
	4WD Crew Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	5,751

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

NEXT GENERATION SIERRA HEAVY DUTY CHASSIS CAB

SIERRA CHASSIS CAB VEHICLE DIMENSIONS

SIERRA CHASSIS CAB REGULAR CAB

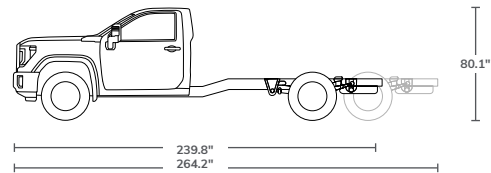


Sierra 3500 HD Chassis Cab allows you to choose from Regular and Crew Cab options.

MAX PAYLOAD	MAX GCWR	MAX GVWR
Regular Cab: 7,571 lbs ¹	40,000 lbs ³	14,000 lbs ⁴
Crew Cab: 7,040 lbs ²		

¹Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ²Requires properly equipped 2WD Crew Cab DRW model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ³40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ⁴Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.

SIERRA CHASSIS CAB CREW CAB

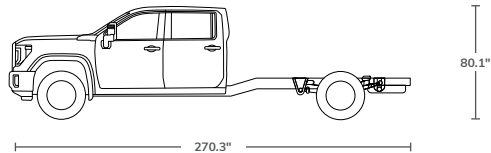

VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 11

2020 SIERRA 1500



OVERVIEW

SIERRA 1500



KEY TRAILERING FEATURES

- UP TO 15 CAMERA VIEWS¹ ARE AVAILABLE
- AVAILABLE GMC PROGRADE TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP²
- SMART TRAILER INTEGRATION
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/HAUL MODE
- MULTICOLOR 15" DIAGONAL HEAD-UP DISPLAY IS AVAILABLE
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO TAILGATE

KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 12,100 LBS³
- MAXIMUM HORSEPOWER 420⁴
- MAXIMUM TORQUE 460 LB-FT⁴
- MAXIMUM PAYLOAD 2,240 LBS⁵
- MAXIMUM SEATING CAPACITY OF SIX⁶
- MAXIMUM CREW CAB CARGO VOLUME 71.7 CU. FT.⁷

POWERTRAINS

- AVAILABLE 6.2L V8 WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 3.0L TURBO DIESEL WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 8-SPEED OR AVAILABLE 10-SPEED AUTOMATIC TRANSMISSION (4WD)
- AVAILABLE 2.7L TURBO WITH 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 WITH 6-SPEED AUTOMATIC TRANSMISSION

¹Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. ²App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ³12,100-lb rating requires properly equipped Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴Requires available 6.2L V8 engine. ⁵Requires properly equipped Regular Cab long bed 2WD model with 4.3L V6 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁶Requires Double Cab or Crew Cab model with front 40/20/40 bench seat. ⁷Requires standard bed model. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SIERRA 1500

SPECIFICATIONS

Engine	Cab	Bed	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Conventional Hitch (lbs) ³	Max Fifth-Wheel Hitch (lbs) ³	Max Gooseneck Hitch (lbs) ³	Max Payload (lbs) ⁴
4.3L EcoTec3 V6	Crew 2WD	Short	6,800	12,800	3.42	7,700	7,600	7,600	2,030
	Crew 4WD	Short	7,000	12,800	3.42	7,500	7,400	7,400	2,010
	Crew 2WD	Standard	6,800	12,800	3.42	7,600	7,500	7,500	1,950
	Crew 4WD	Standard	7,000	12,800	3.42	7,400	7,300	7,300	1,960
	Double 2WD	Standard	6,800	12,800	3.42	7,700	7,600	7,600	2,030
	Double 4WD	Standard	7,000	12,800	3.42	7,500	7,400	7,400	2,020
	Regular 2WD	Long	6,800	12,800	3.42	7,900	7,800	7,800	2,240
	Regular 4WD	Long	6,900	12,800	3.42	7,700	7,600	7,600	2,120
2.7L Turbo	Crew 2WD	Short	6,900	12,000	3.42	6,800	6,800	6,800	2,060
	Crew 4WD	Short	7,000	12,000	3.42	6,600	6,600	6,600	2,030
	Crew 2WD	Standard	6,800	12,000	3.42	6,800	6,700	6,700	1,980
	Crew 4WD	Standard	7,000	12,000	3.42	6,600	6,500	6,500	1,990
	Double 2WD	Standard	6,800	12,000	3.42	6,900	6,800	6,800	2,060
	Double 4WD	Standard	7,000	12,000	3.42	6,700	6,600	6,600	2,040
5.3L EcoTec3 V8 (Base Sierra trim only)	Crew 2WD	Short	6,900	15,000	3.42	9,800	9,700	9,700	2,060
	Crew 4WD	Short	7,100	15,000	3.42	9,600	9,500	9,500	2,040
	Crew 2WD	Standard	6,900	15,000	3.42	9,700	9,700	9,700	1,990
	Crew 4WD	Standard	7,100	15,000	3.42	9,500	9,500	9,500	1,990
	Double 2WD	Standard	6,800	15,000	3.42	9,800	9,700	9,700	1,960
	Double 4WD	Standard	7,000	15,000	3.42	9,600	9,500	9,500	1,950
	Regular 2WD	Long	6,800	15,000	3.42	10,000	10,000	10,000	2,180
	Regular 4WD	Long	6,900	15,000	3.42	9,800	9,700	9,700	2,060

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY CONTINUED

SIERRA 1500

SPECIFICATIONS

Engine	Cab	Bed	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Conventional Hitch (lbs) ³	Max Fifth-Wheel Hitch (lbs) ³	Max Gooseneck Hitch (lbs) ³	Max Payload (lbs) ⁴
5.3L EcoTec3 V8	Crew 2WD	Short	7,100 ⁵	16,800 ⁵	3.23	9,600	9,100	9,100	2,140 ⁵
					3.42	11,300 ⁵	10,200 ⁵	10,200 ⁵	
	Crew 4WD	Short	7,300 ⁵	16,800 ⁵	3.23	9,300 ⁵	8,100 ⁷	8,100 ⁷	2,120
					3.42	11,100 ⁵	8,500 ⁵	8,500 ⁵	
	Crew 2WD	Standard	7,100 ⁵	16,800 ⁵	3.23	9,500	8,700	8,700	2,070 ⁵
					3.42	11,300 ⁵	9,800 ⁵	9,800 ⁵	
	Crew 4WD	Standard	7,300 ⁵	16,800 ⁵	3.23	9,200	7,800	7,800	2,080 ⁵
					3.42	11,000 ⁵	9,600 ⁵	9,600 ⁵	
	Double 2WD	Standard	7,100 ⁵	16,800 ⁵	3.23	9,600	8,700	8,700	2,170 ⁵
					3.42	11,300 ⁵	10,400 ⁵	10,400 ⁵	
	Double 4WD	Standard	7,300 ⁵	16,800 ⁵	3.23	9,300	8,300	8,300	2,150 ⁵
					3.42	11,100 ⁵	10,100 ⁵	10,100 ⁵	
6.2L EcoTec3 V8	Crew 4WD	Short	7,300 ⁵	17,800 ⁵	3.23	8,800	7,300 ⁸	7,300 ⁸	2,000 ⁵
					3.42	12,000 ⁵	9,800 ⁵	9,800 ⁵	
	Crew 4WD	Standard	7,300 ⁵	17,800 ⁵	3.23	9,000	7,000 ⁹	7,000 ⁹	1,950 ⁵
					3.42	12,000 ⁵	9,500 ⁵	9,500 ⁵	
	Double 4WD	Standard	7,300 ⁵	17,800 ⁵	3.23	9,300	7,400	7,400	2,070 ⁵
					3.42	12,100 ⁵	10,000 ⁵	10,000 ⁵	
Duramax 3.0L Turbo Diesel I6	Crew 2WD	Short	7,000	15,000	3.23	7,400	7,300	7,300	1,830
					3.42	9,000	7,000	7,000	
	Crew 4WD	Short	7,200	15,000	3.23	7,300	7,200	7,200	1,750
					3.42	9,000	6,900	6,900	
	Double 2WD	Standard	6,900	15,000	3.23	7,400	7,300	7,300	1,750
					3.42	9,100	7,000	7,000	
Double 4WD	Standard	7,100	15,000	3.23	7,400	7,300	7,300	1,740	
				3.42	9,100	7,000	7,000		

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires available Max Trailering Package. ⁶AT4 trailering capacity is 9,800 lbs. ⁷AT4 trailering capacity is 8,200 lbs. ⁸AT4 trailering capacity is 7,600 lbs. ⁹AT4 trailering capacity is 7,100 lbs.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

SIERRA 1500

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L Gasoline V6	3.92 x 3.62 / 99.6 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Active Fuel Management	285 @ 5300	305 @ 3900
2.7L I4 Turbo Gasoline	3.63 x 4.01 / 92.25 x 102	Cast aluminum	Cast aluminum	10.0:1	Dual-overhead camshafts, four valves per cylinder, tri-power valvetrain with continuously Variable Valve Timing, variable valve lift and Active Fuel Management	Direct high-pressure fuel injection with Active Fuel Management	310 @ 5600	348 @ 1500
5.3L Gasoline V8 (Base Sierra only)	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Active Fuel Management	355 @ 5600	383 @ 4100
5.3L Gasoline V8	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Dynamic Fuel Management	355 @ 5600	383 @ 4100
6.2L Gasoline V8	4.06 x 3.62 / 103.25 x 92	Cast aluminum	Cast aluminum	11.5:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Dynamic Fuel Management	420 @ 5600	460 @ 4100
3.0L I6 Turbo Diesel	3.30 x 3.54 / 84 x 90	Cast aluminum	Cast aluminum	15.0:1	Dual-overhead camshafts, four valves per cylinder	High-pressure, common-rail direct injection (36,250 psi/2,500 bar); electronic throttle valve	277 @ 3750	460 @ 1500

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio (Standard/Optional)
6L80 6-speed automatic (4.3L, 5.3L w/AFM gas)	6L80 6-speed	4.03	2.36	1.53	1.15	0.85	0.66	--	--	--	--	3.06	3.42/--
8L90 8-speed automatic (2.7L gas)	8L90 8-speed	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	--	--	3.82	3.42/--
8L90 8-speed automatic (5.3L w/DFM gas)	8L90 8-speed	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	--	--	3.82	3.23/3.42
10L80 10-speed automatic (4WD 5.3L w/DFM, 6.2L w/DFM gas, 3.0L Turbo Diesel)	10L80 10-speed	4.69	2.99	2.15	1.80	1.52	1.28	1.00	0.85	0.69	0.63	4.86	3.23 diesel 3.23/3.42 gas



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

SIERRA 1500

SELECT SIERRA 1500 CAB DIMENSIONS


CREW CAB

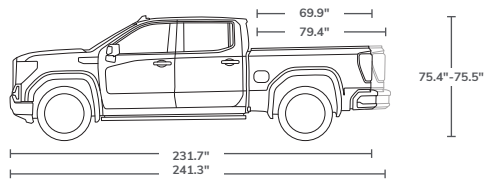

Sierra Crew Cab comes with either a short or available standard bed.

WHEELBASE 147.4"-157"	PASSENGER CAPACITY Seating for up to six
REAR LEG ROOM 43.4"	CARGO VOLUME 62.9-71.7 cu. ft. ¹
FRONT HEAD ROOM 43"	FRONT LEG ROOM 44.5"

REGULAR CAB

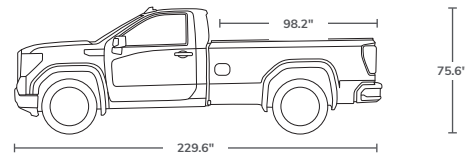


Sierra Regular Cab comes with a long bed.

WHEELBASE 139.6"	PASSENGER CAPACITY Seating for up to three
FRONT SHOULDER ROOM 66.1"	CARGO VOLUME 89.1 cu. ft. ¹
FRONT HEAD ROOM 43.1"	FRONT LEG ROOM 44.5"

¹Cargo and load capacity limited by weight and distribution.

DOUBLE CAB

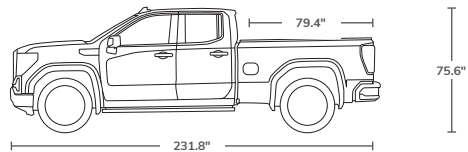

Sierra Double Cab models come with a standard bed.

WHEELBASE 147.4"	PASSENGER CAPACITY Seating for up to six
REAR LEG ROOM 35.2"	CARGO VOLUME 71.7 cu. ft. ¹
FRONT HEAD ROOM 43"	FRONT LEG ROOM 44.5"



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 17

2020 CANYON



OVERVIEW CANYON



KEY TRAILERING FEATURES

- STABILITRAK WITH TRAILER SWAY CONTROL
- AVAILABLE TOW/HAUL MODE
- AVAILABLE AUTOMATIC LOCKING REAR DIFFERENTIAL
- AVAILABLE DIESEL EXHAUST BRAKE
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER

KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 7,700 LBS¹
- MAXIMUM HORSEPOWER 308²
- MAXIMUM TORQUE 369 LB-FT³
- MAXIMUM PAYLOAD 1,609 LBS⁴
- MAXIMUM CARGO VOLUME 49.9 CU. FT.⁵
- MAXIMUM SEATING CAPACITY OF FIVE⁶

POWERTRAIN

- AVAILABLE 3.6L GAS V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 2.5L 4-CYLINDER GAS ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION

¹7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 3.6L gas V6 engine. ³Requires available 2.8L Duramax Turbo Diesel engine. ⁴1,609-lb rating requires Base Canyon Crew Cab 2WD model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires long bed model. Cargo and load capacity limited by weight and distribution. ⁶Requires Crew Cab model.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY CANYON

SPECIFICATIONS

Engine	Cab	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Conventional Trailer Weight (lbs) ³	Max Payload (lbs) ⁴
2.5L I4	Canyon Crew Cab Short Bed 2WD/4WD	5,500	8,500	4.10	3,500	1,475
	Canyon Extended Cab 2WD	5,400	8,500	4.10	3,500	1,433
	Canyon Extended Cab 4WD	5,600	8,500	4.10	3,500	1,432
3.6L V6	Canyon Crew Cab Short Bed 2WD	5,800	12,000	3.42	7,000 ⁵	1,609
	Canyon Crew Cab Short Bed 4WD	6,000	12,000	3.42	7,000 ⁵	1,531
	Canyon Crew Cab Long Bed 4WD	6,000	12,000	3.42	7,000 ⁵	1,475
	Canyon Extended Cab 2WD	5,700	12,000	3.42	7,000 ⁵	1,602
	Canyon Extended Cab 4WD	5,900	12,000	3.42	7,000 ⁵	1,562
2.8L Duramax Turbo Diesel	Canyon Crew Cab Short Bed 2WD	6,000	12,700	3.42	7,700	1,496
	Canyon Crew Cab Short Bed 4WD	6,200	12,700	3.42	7,600	1,460
	Canyon Crew Cab Long Bed 4WD	6,200	12,700	3.42	7,550	1,398

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

CANYON

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
2.5L I4 Gas	3.46 x 3.97 / 88 x 101	Cast aluminum	Cast aluminum	11.3:1	Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing	High-pressure direct fuel injection with electronic throttle control	200 @ 6300	191 @ 4400
3.6L Gas V6	3.74 x 3.37 / 94 x 85.6	Cast aluminum	Cast aluminum	11.5:1	Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing	High-pressure direct fuel injection with electronic throttle control	308 @ 6800	275 @ 4000
2.8L Duramax Turbo Diesel	3.7 x 3.94 / 94 x 100	Gray cast iron	Cast aluminum	16.5:1	Dual-overhead camshafts with four valves per cylinder	Common-rail direct fuel injection	181 @ 3400	369 @ 2000

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L50 6-speed automatic (2.5L gas/2.8L Duramax Turbo Diesel)	6L50	4.06	2.37	1.55	1.16	0.85	0.67	--	--	3.20	4.10 gas 3.42 diesel
8L45 8-speed automatic (3.6L gas)	8L45	4.61	3.04	2.06	1.66	1.26	1.00	0.85	0.66	3.69	3.42



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

CANYON

SELECT CANYON DIMENSIONS

CREW CAB

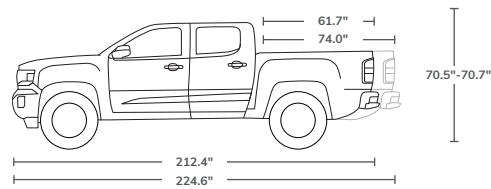


The Canyon Crew Cab model comes in 2WD or 4WD with a short or long bed.

CARGO VOLUME
41.3-49.9 cu. ft.¹
WHEELBASE
128.3"-140.5"

GVWR
5,400-6,200 lbs²
FRONT/REAR LEG ROOM
45.0"/35.8"

EXTENDED CAB

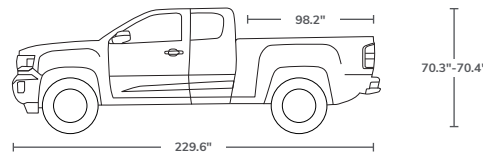

The Canyon Extended Cab model comes in 2WD or 4WD with a 6' 2" bed.

CARGO VOLUME
49.9 cu. ft.¹
WHEELBASE
128.3"

GVWR
5,400-5,900 lbs²
FRONT/REAR LEG ROOM
45.0"/28.6"

¹Cargo and load capacity limited by weight and distribution. ²Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 22

2020 YUKON AND YUKON XL



OVERVIEW

YUKON AND YUKON XL



KEY TRAILERING FEATURES

- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- AVAILABLE PREMIUM SMOOTH RIDE SUSPENSION PACKAGE WITH AIR LEVELER

KEY SPECIFICATIONS

- MAXIMUM TRAILERING 8,500 LBS¹ (YUKON)
- MAXIMUM TRAILERING 8,300 LBS¹ (YUKON XL)
- MAXIMUM HORSEPOWER 420²
- MAXIMUM TORQUE 460 LB-FT²
- MAXIMUM PAYLOAD 1,690 LBS³
- MAXIMUM CARGO VOLUME 121.7 CU. FT.⁴
- MAXIMUM SEATING CAPACITY OF NINE⁵

POWERTRAIN

- 5.3L V8 PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.2L V8 PAIRED WITH A 10-SPEED AUTOMATIC TRANSMISSION

¹Requires 2WD model with 5.3L V8 engine and available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 6.2L V8 engine. ³1,690-lb rating requires short wheelbase 2WD non-Denali model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires XL model; behind first row. Cargo and load capacity limited by weight and distribution. ⁵SLE model only.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

YUKON AND YUKON XL

YUKON SPECIFICATIONS					
Engine	Model	Max GVWR (lbs) ¹	Axle Ratio	Max Trailer Weight Rating (lbs) ²	Max Payload (lbs) ³
5.3L V8	Yukon 2WD	7,100	3.08	6,500	1,690
			3.42	8,500 ⁴	
	Yukon 4WD	7,300	3.08	6,300	1,650
			3.42	8,200 ⁴	
6.2L V8	Yukon Denali 2WD	7,100	3.23	8,400	1,590
	Yukon Denali 4WD	7,300	3.23	8,100	1,530

YUKON XL SPECIFICATIONS					
Engine	Model	Max GVWR (lbs) ¹	Axle Ratio	Max Trailer Weight Rating (lbs) ²	Max Payload (lbs) ³
5.3L V8	Yukon XL 2WD	7,300	3.08	6,300	1,660
			3.42	8,300 ⁴	
	Yukon XL 4WD	7,500	3.08	6,000	1,630
			3.42	8,000 ⁴	
6.2L V8	Yukon XL Denali 2WD	7,300	3.23	8,100	1,610
	Yukon XL Denali 4WD	7,500	3.23	7,900	1,510

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires available Heavy-Duty Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

YUKON AND YUKON XL

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
5.3L V8	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct Injection with Active Fuel Management	355 @ 5600	383 @ 4100
6.2L V8	4.06 x 3.62 / 103.25 x 92	Cast aluminum	Cast aluminum	11.5:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct Injection with Active Fuel Management	420 @ 5600	460 @ 4100

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio (Standard/Optional)
6L80 6-speed automatic (5.3L)	6L80	4.03	2.36	1.53	1.15	0.85	0.67	--	--	--	--	3.06	3.08/3.42
10L80 10-speed automatic (6.2L)	10L80	4.69	2.98	2.14	1.77	1.52	1.27	1.00	0.85	0.69	0.63	4.86	3.23



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

YUKON AND YUKON XL

YUKON DIMENSIONS

YUKON

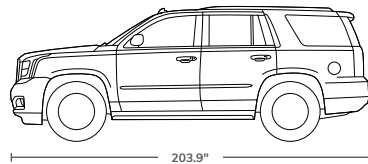

74.4"

203.9"

Yukon comes with three rows of seating and is available in either 2WD or 4WD configurations.

PASSENGER CAPACITY
Seating for up to nine¹

LEG ROOM (FIRST/SECOND/THIRD ROW)
45.3"/39.0"/24.8"


CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW)
94.7/51.7/15.3 cu. ft.²

FUEL TANK CAPACITY
Approx. 26.0 gallons

AXLE RATIO
3.08/3.42/3.23

MAX TRAILERING
8,500 lbs³

YUKON XL



74.4"

224.4"

Yukon XL comes with three rows of seating and additional cargo room and is available in either 2WD or 4WD configurations.

PASSENGER CAPACITY
Seating for up to nine¹

LEG ROOM (FIRST/SECOND/THIRD ROW)
45.3"/39.7"/34.5"

CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW)
121.7/76.7/39.3 cu. ft.²

FUEL TANK CAPACITY
Approx. 31.0 gallons

AXLE RATIO
3.08/3.42/3.23

MAX TRAILERING
8,300 lbs³

¹SLE model only. ²Cargo and load capacity limited by weight and distribution. ³Requires 2WD model with available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 27

2020 ACADIA



OVERVIEW

ACADIA



KEY TRAILERING FEATURE

- AVAILABLE HITCH GUIDANCE WITH HITCH VIEW¹

KEY SPECIFICATIONS

- MAXIMUM TRAILERING 4,000 LBS²
- MAXIMUM HORSEPOWER 310³
- MAXIMUM TORQUE 271 LB-FT³
- MAXIMUM CARGO VOLUME 79.0 CU. FT.⁴
- MAXIMUM SEATING CAPACITY OF UP TO SEVEN

POWERTRAIN

- AVAILABLE NEW 2.0L TURBO
- AVAILABLE 3.6L V6 ENGINE
- 2.5L ENGINE

¹Read the vehicle Owner's Manual for important feature limitations and information. ²Requires available 3.6L V6 engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available 3.6L V6 engine. ⁴Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

ACADIA

SPECIFICATIONS				
Engine	Model	Max GVWR (lbs) ¹	Axle Ratio	Max Trailer Weight Rating (lbs) ²
2.5L I4	SL/SLE FWD	6,001	3.80	1,000
2.0L Turbo I4	SLE AWD/SLT	6,001	3.47	1,500
3.6L V6	SLE/SLT/AT4/Denali	6,001	3.49	4,000 ³

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

ACADIA

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
2.5L I4	3.46 x 3.97 / 88 x 101	Lost foam cast aluminum	Lost foam cast aluminum	11.3:1	Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing	Direct Injection with electronic throttle control	193 @ 6300	188 @ 4400
2.0L Turbo I4	3.26 x 3.63 / 83 x 92.3	Cast aluminum	Cast aluminum	10:1	Dual overhead camshafts, four valves per cylinder with tri-power system	Direct Injection with electronic throttle control	230 @ 5000	258 @ 1500-4000
3.6L V6	3.74 x 3.37 / 95 x 85.8	Cast aluminum with cast-in-place iron bore liners	Cast aluminum	11.5:1	Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing	Direct Injection with electronic throttle control	310 @ 6600	271 @ 5000

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Reverse	Final Drive Ratio
9T50 9-speed automatic (2.5L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.80
9T60 9-speed automatic (2.0L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.47
9T65 9-speed automatic (3.6L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.49



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

ACADIA

ACADIA DIMENSIONS

ACADIA

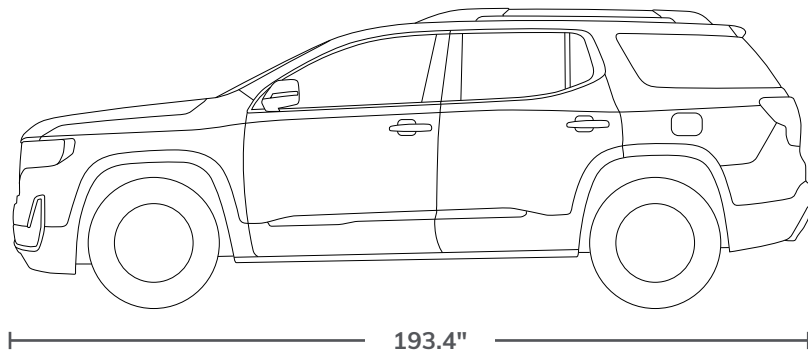

BASE CURB WEIGHT
3,923 lbs

PASSENGER CAPACITY
Seating for up to seven

**HEAD ROOM
(FIRST/SECOND/THIRD ROW)**
40.0"/39.6"/37.2"

MAX TRAILERING
4,000 lbs¹

**CARGO VOLUME
(BEHIND FIRST/SECOND/
THIRD ROW)**
79.0/41.7/12.8 cu. ft.²

**LEG ROOM
(FIRST/SECOND/THIRD ROW)**
41.0"/39.7"/29.7"

**FUEL TANK CAPACITY
(FWD/AWD)**
Approx. 19.0/22.0 gallons

¹Requires available 3.6L engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 32

2020 TERRAIN



OVERVIEW

TERRAIN



KEY SPECIFICATIONS

- MAXIMUM TRAILERING 3,500 LBS¹
- MAXIMUM HORSEPOWER 252²
- AVAILABLE MAXIMUM TORQUE 260 LB-FT²
- MAXIMUM CARGO VOLUME 63.3 CU. FT.³
- MAXIMUM SEATING CAPACITY OF FIVE

POWERTRAIN

- 1.5L TURBO ENGINE
- AVAILABLE 2.0L TURBO ENGINE

¹Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 2.0L engine.

³Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS

TERRAIN

SPECIFICATIONS				
Engine	Model	Max GVWR (lbs) ¹	Axle Ratio	Max Trailer Weight Rating (lbs) ²
1.5L Turbo I4	SL/SLE/SLT FWD	4,464	3.47	1,500
	SLE/SLT AWD	4,630	3.47	1,500
2.0L Turbo I4	SLT/DENALI FWD	4,630	3.17	3,500 ³
	SLT/DENALI AWD	4,850	3.17	3,500 ³

ENGINE SPECIFICATIONS								
Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
1.5L Turbo I4	2.93 x 3.409 (74.4 x 86.6)	Cast aluminum	Cast aluminum	10.0:1	Dual overhead camshafts; four valves per cylinder	Direct Injection	170 @ 5600	203 @ 2000-4000
2.0L Turbo I4	3.38 x 3.38 (85.9 x 85.9)	Cast aluminum	Cast aluminum	9.5:1	Dual overhead camshafts; four valves per cylinder	Direct Injection	252 @ 5500	260 @ 2500-4500

TRANSMISSION SPECIFICATIONS												
Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Reverse	Final Drive Ratio
9T45 9-speed automatic (1.5L)	9T45	4.69	3.31	3.01	2.44	1.92	1.44	1.00	0.75	0.62	2.96	3.47
9T50 9-speed automatic (2.0L)	9T50	4.69	3.31	3.01	2.44	1.92	1.44	1.00	0.75	0.62	2.96	3.17

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

TERRAIN

TERRAIN DIMENSIONS

TERRAIN

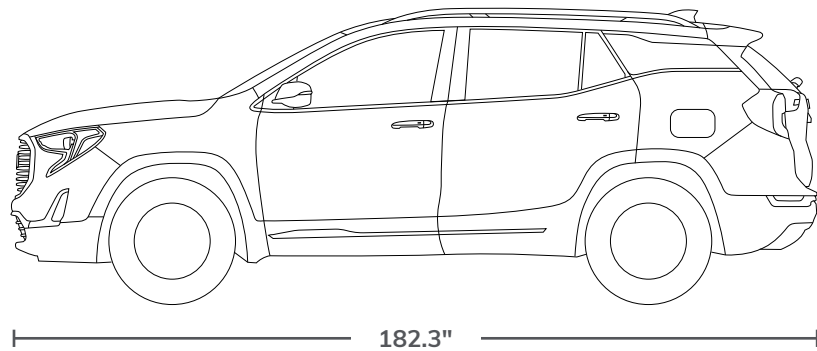

BASE CURB WEIGHT
3,449 lbs

PASSENGER CAPACITY
Seating for up to five

HEAD ROOM (FIRST/SECOND ROW)
40.0"/38.5"

MAX TRAILERING
3,500 lbs¹

CARGO VOLUME (BEHIND FIRST/SECOND ROW)
63.3/29.6 cu. ft.²

LEG ROOM (FIRST/SECOND ROW)
40.9"/39.7"

FUEL TANK CAPACITY (FWD/AWD)
Approx. 14.9/15.6 gallons

¹Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 36

2020 SAVANA



OVERVIEW

SAVANA CARGO VAN



KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

KEY SPECIFICATIONS

- MAXIMUM CARGO VOLUME 283.6 CU. FT.¹
- AVAILABLE MAXIMUM SEATING CAPACITY OF FIVE²
- MAXIMUM TRAILERING 10,000 LBS³
- MAXIMUM GCWR 16,000 LBS⁴

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires extended wheelbase model. Cargo and load capacity limited by weight and distribution. ²Requires available Savana Crew Van Package and swing-out rear side door window glass. ³10,000-lb trailer rating requires the available 6.0L V8 engine and Trailering Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴16,000-lb GCWR requires the available 6.0L V8 engine and Trailering Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA CARGO VAN

SAVANA 2500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Trailer Weight Rating (lbs) ³	Max Payload (lbs) ⁴
4.3L V6	Regular Wheelbase RWD	8,600	13,000	3.42	7,400	3,280
	Extended Wheelbase RWD	8,600	13,000	3.42	7,100	3,060
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	8,600	16,000	3.42	10,000	3,050
	Extended Wheelbase RWD	8,600	16,000	3.42	10,000	2,820
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	8,600	13,000	3.42	7,000	2,850
	Extended Wheelbase RWD	8,600	13,000	3.42	6,100	2,640

SAVANA 3500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Trailer Weight Rating (lbs) ³	Max Payload (lbs) ⁴
4.3L V6	Regular Wheelbase RWD	9,600	13,000	3.42	7,400	4,250
	Extended Wheelbase RWD	9,600	13,000	3.42	7,200	4,060
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	9,600	16,000	3.42	10,000	4,020
	Extended Wheelbase RWD	9,600	16,000	3.42	10,000	3,820
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	9,600	13,000	3.42	6,200	3,820
	Extended Wheelbase RWD	9,600	13,000	3.42	6,000	3,930

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

OVERVIEW

2020 SAVANA PASSENGER VAN



KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF 15¹
- MAXIMUM CONVENTIONAL TRAILERING 9,600 LBS²
- MAXIMUM GCWR 16,000 LBS³

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires extended wheelbase model and available 15-passenger seating configuration. ²9,600-lb trailer rating requires regular wheelbase model, available 6.0L V8 engine and Trailering Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³16,000-lb GCWR requires the available 6.0L V8 engine and Trailering Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA PASSENGER VAN

SAVANA 2500 SPECIFICATIONS						
Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Trailer Weight Rating (lbs) ³	Max Payload (lbs) ⁴
4.3L V6	Regular Wheelbase RWD	8,600	13,000	3.42	6,700	2,550
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	8,600	16,000	3.42	9,600	2,390
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	8,600	13,000	3.42	6,300	2,200

SAVANA 3500 SPECIFICATIONS						
Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Trailer Weight Rating (lbs) ³	Max Payload (lbs) ⁴
4.3L V6	Regular Wheelbase RWD	9,600	13,000	3.42	6,700	3,550
	Extended Wheelbase RWD	9,600	13,000	3.42	6,300	3,210
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	9,600	16,000	3.42	9,600	3,390
	Extended Wheelbase RWD	9,600	16,000	3.42	9,200	3,050
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	9,600	13,000	3.42	5,700	3,200
	Extended Wheelbase RWD	9,600	13,000	3.42	5,300	3,170

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

SAVANA CARGO/PASSENGER VANS

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L V6 Gasoline	3.92 x 3.62 / 99.6 x 91.9	Aluminum	Aluminum	11.0:1	Overhead valve, two valves per cylinder	Sequential fuel injection	276 @ 5200	298 @ 3900
6.0L V8 Gasoline	4.4 x 3.62 / 111.8 x 91.9	Cast iron	Cast aluminum	9.6:1	Overhead valve, two valves per cylinder	Sequential fuel injection	324 @ 4700	373 @ 4400
6.0L V8 Gaseous	4 x 3.662 / 101.6 x 92	Cast iron	Cast aluminum	9.7:1	Overhead valve, two valves per cylinder	Sequential fuel injection	282 @ 4800	320 @ 4400
2.8L Turbo Diesel	3.7 x 3.937 / 94 x 100	Gray cast iron	Aluminum	16.5:1	Dual overhead camshafts with four valves per cylinder	Common-rail direct fuel injection	181 @ 3400	369 @ 2000

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L90 6-speed automatic (6.0L gas/gaseous)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	--	--	3.06	3.42
8L90 8-speed automatic (4.3L gas)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42
8-speed automatic with diesel-specific torque converter (2.8L Turbo Diesel)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

OVERVIEW

SAVANA CUTAWAY



KEY FEATURES

- 33-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES

KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF TWO
- MAXIMUM PAYLOAD 8,940 LBS¹
- MAXIMUM GVWR 14,200 LBS²
- MAXIMUM FUEL TANK CAPACITY UP TO APPROXIMATELY 57 GALLONS³
- MAXIMUM GCWR 20,000 LBS⁴

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires properly equipped 4500 Series 159" wheelbase model with 6.0L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ²Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ³Available feature. See gmc.com or your dealer for more availability details. ⁴Requires 4500 Series model. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA CUTAWAY

SAVANA 3500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Payload (lbs) ³
4.3L V6	139" Wheelbase	10,100	13,000	3.42 ⁴ 3.73 ⁵	2,500
	159" Wheelbase	9,900	13,000	3.42 ⁴ 3.73 ⁵	5,270
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous	139" Wheelbase	12,300	16,000	3.42 3.73 ⁵	5,150
	159" Wheelbase	12,300	16,000	3.42 3.73 ⁵	5,090
	177" Wheelbase	12,300	16,000	3.73 ⁵	7,080

SAVANA 4500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) ¹	Max GCWR (lbs) ²	Axle Ratio	Max Payload (lbs) ³
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous	159" Wheelbase	14,200	20,000	4.10	8,940
	177" Wheelbase	14,200	20,000	4.10	8,860

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires single-rear-wheel configuration. ⁵Requires dual-rear-wheel configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

SAVANA CUTAWAY

ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L Gas V6	3.92 x 3.62 / 99.6 x 91.9	Aluminum	Aluminum	11.0:1	Overhead valve, two valves per cylinder	Sequential fuel injection	276 @ 5200	298 @ 3900
6.0L Gas V8	4.4 x 3.62 / 111.8 x 91.9	Cast iron	Cast aluminum	9.6:1	Overhead valve, two valves per cylinder	Sequential fuel injection	341 @ 5400	373 @ 4200
6.0L Gas V8	4 x 3.662 / 101.6 x 92	Cast iron	Cast aluminum	9.7:1	Overhead valve, two valves per cylinder	Sequential fuel injection	341 @ 5400	373 @ 4200

TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (-1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L90 6-speed automatic (6.0L gas)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	--	--	3.06	3.42 ¹ /3.73 ² /4.10 ³
8L90 8-speed automatic (4.3L gas)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42

¹3.42 ratio requires single-rear-wheel configuration. ²3.73 ratio requires dual-rear-wheel configuration. ³4.10 ratio requires dual-rear-wheel configuration. See your dealer for more availability details.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

SAVANA VAN

SAVANA VEHICLE DIMENSIONS

SAVANA 2500 CARGO

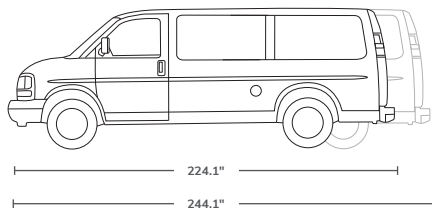


The Savana 2500 Cargo Van offers a regular or extended wheelbase.

MAX GVWR
8,600 lbs¹

FUEL TANK CAPACITY
Approx. 31 gallons

MAX PAYLOAD
3,280 lbs² (regular);
3,060 lbs² (extended)

SAVANA 2500 PASSENGER

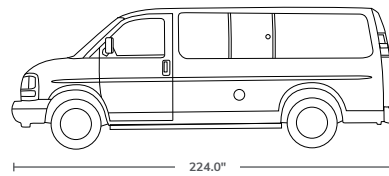


The Savana 2500 Passenger Van offers a regular wheelbase.

MAX GVWR
8,600 lbs¹

FUEL TANK CAPACITY
Approx. 31 gallons

MAX PAYLOAD
2,550 lbs²

SAVANA 3500 CARGO

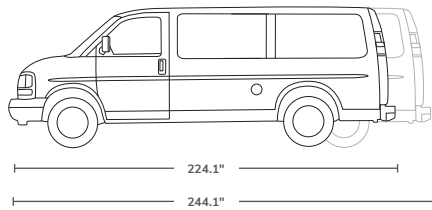


The Savana 3500 Cargo Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

MAX GVWR
9,900 lbs¹

FUEL TANK CAPACITY
Approx. 31 gallons

MAX PAYLOAD
4,250 lbs² (regular);
4,060 lbs² (extended)

SAVANA 3500 PASSENGER

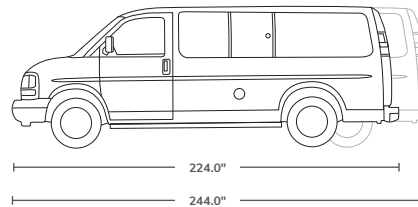


The Savana 3500 Passenger Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

MAX GVWR
9,900 lbs¹

FUEL TANK CAPACITY
Approx. 31 gallons

MAX PAYLOAD
3,550 lbs² (regular);
3,210 lbs² (extended)

SAVANA CUTAWAY

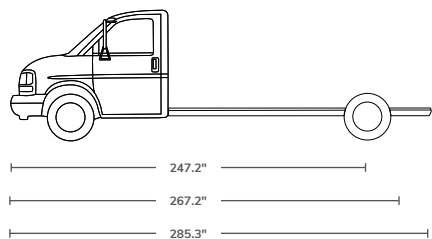

The Savana Cutaway comes with a choice of three wheelbases—139", 159" and 177".

MAX GVWR
9,900-14,200 lbs¹

MAX FRONT GAWR
4,100-4,600 lbs

MAX REAR GAWR
6,084-7,600 lbs

FUEL TANK CAPACITY
Approx. 33 gallons (standard)
Approx. 57 gallons (available)

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY




TRAILERING TECHNOLOGY

CAMERA SYSTEM

UP TO 15 AVAILABLE CAMERA VIEWS Trailering is all about confidence. Assurance that everything is operating as it should, every step of the journey. In the Next Generation Sierra Heavy Duty and Sierra 1500, that faith starts with the available ProGrade Trailering System and the views it offers—you can have up to 15 camera views¹ when equipped with the available Technology Package and accessory cameras and installation. It helps when hooking up your trailer, while on the road and when backing your trailer into place. One of those views is the industry-first available transparent trailer view, which helps you to virtually see right through the trailer to detect objects behind it.

- 1 TRANSPARENT TRAILER VIEW
- 2 HITCH VIEW
- 3 BED VIEW
- 4 FRONT CAMERA VIEW
- 5 REAR CAMERA VIEW
- 6 SURROUND VIEW
- 7 FRONT TOP-DOWN VIEW
- 8 REAR TOP-DOWN VIEW
- 9 BOWL VIEW
- 10 FRONT SIDE VIEW
- 11 REAR SIDE VIEW (WITH TRAILER BIASING)
- 12 REAR TRAILER VIEW
- 13 INSIDE TRAILER VIEW
- 14 PICTURE-IN-PICTURE SIDE VIEW
- 15 REAR CAMERA MIRROR

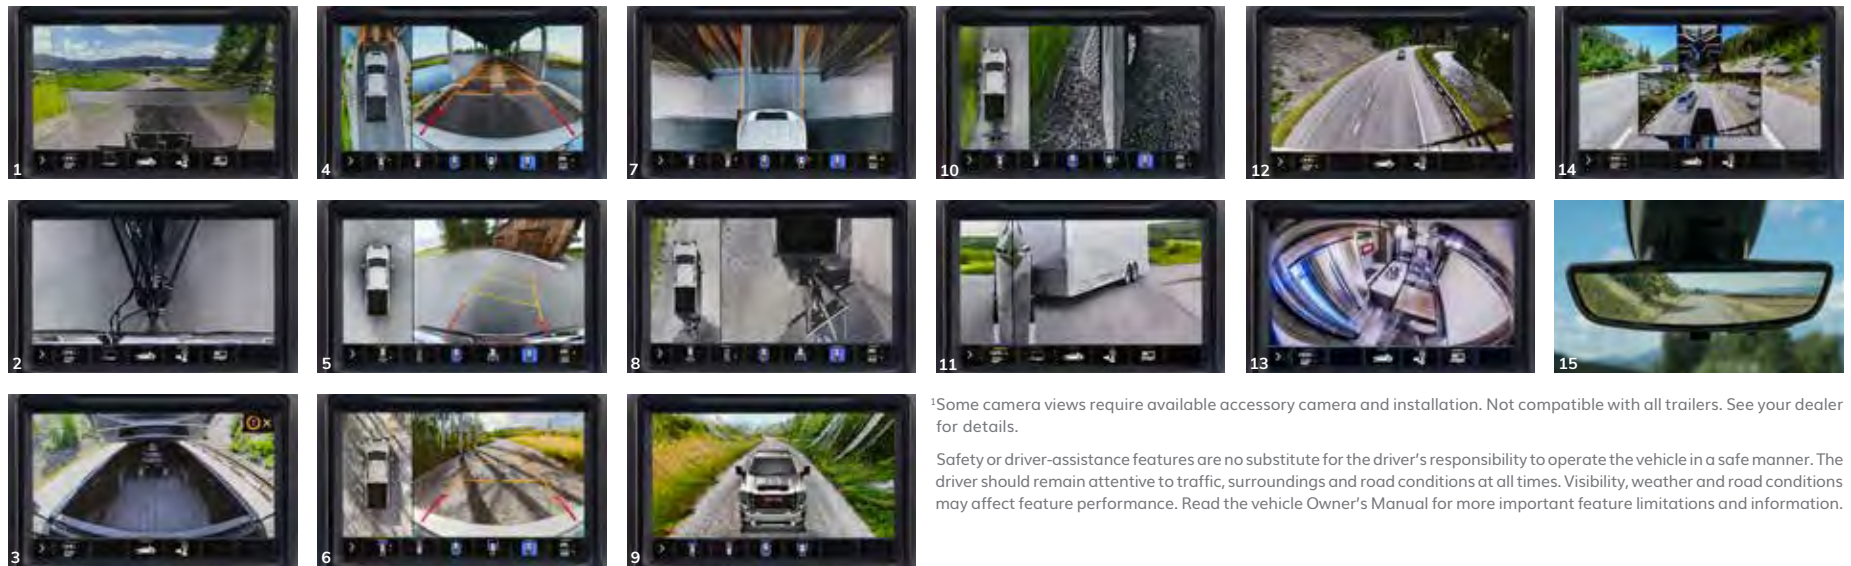

¹Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

Safety or driver-assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY HIGHLIGHTS

PROGRADE TRAILERING SYSTEM GMC's available ProGrade Trailering System on Sierra 1500 and Sierra Heavy Duty models includes advanced technologies for increased views and confidence. It helps when hooking up your trailer, while on the road and when backing your trailer into place.

■ **IN-VEHICLE TRAILERING APP¹** Located on the home screen of the infotainment system,² this innovation offers customized trailer profiles to track and monitor predeparture checklists, trailer electrical diagnostics (detecting shorts in the trailer lighting circuits, for example), trailer tire pressure and temperature status (if equipped),³ a Trailer Light Sequence Test, maintenance reminders and more. The Trailering App will also monitor trailer presence, even while the vehicle is off, by periodically checking the trailer lighting circuits. On trailers equipped with LED lights, these periodic checks may cause the trailer lights to flash. This flashing will become more frequent if Theft Alert is enabled.

■ **myGMC APP⁴** The available myGMC app gives you access to features such as creating and managing trailer profiles (shareable with other compatible Sierra owners), a Trailer Light Sequence Test that provides the ability to remotely activate trailer lights to help ensure they're in working order, predeparture checklists (or create your own) and a Trailer Load Calculator to determine the combined weight of your truck and trailer for a confident towing experience. To monitor trailering health, you can view and receive alerts on key components of your trailer such as tire pressure monitoring³ and trailer miles. There's also a trailering glossary to provide a quick reference to trailering-related materials.

SMART TRAILER INTEGRATION Using the available iN•Command[®] Control System⁵ from ASA Electronics, select GMC vehicles can give drivers control over eligible trailer functions through the myGMC app⁴ or the infotainment system.² Similar to the features of a smart home, iN•Command is the central hub of operations to monitor and control an array of systems in compatible

trailers. You can turn on the trailer's air conditioning or water heater, check water and holding tank levels or monitor fuel levels on trailers equipped with generators.

TRACTION SELECT SYSTEM WITH TOW/HAUL MODE

On select GMC models, this available system allows you to quickly switch to Tow/Haul mode, which adjusts transmission shift points to deliver peak power and trailering performance. On Sierra, the system will retain the Tow/Haul setting configuration for up to 4 hours after it's turned off, eliminating the need to re-engage the system after returning from a brief stop on a long journey.

¹App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ²Functionality varies by model. Full functionality requires compatible Bluetooth[®] and smartphone, and USB connectivity for some devices. ³Requires available Trailer Tire Pressure Monitoring System and trailer tire pressure monitor sensors. Sensors must be installed by the customer or a third-party service center. ⁴Device data connection required. Available on select Apple[®] and Android[™] devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. ⁵iN•Command is provided by ASA Electronics and is designed to operate within 30 feet of the trailer. Works with trailers equipped with the iN•Command Control System with GlobalConnect via Bluetooth connection. Control and monitoring functionality varies by trailer manufacturer, model and installed options. Use of the iN•Command Control System feature through the myGMC app requires active service plan. User terms apply. See onstar.com for details and limitations.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY AVAILABILITY

SELECT TRAILERING TECHNOLOGY AVAILABILITY BY VEHICLE										
	Sierra 1500	Sierra 2500 Heavy Duty	Sierra 3500 Heavy Duty	Sierra Chassis Cab	Yukon/ Yukon XL	Canyon	Acadia	Terrain	Savana	Savana Cutaway
● STANDARD ○ AVAILABLE – NOT AVAILABLE										
In-vehicle Trailering App ¹	○	○	○	—	—	—	—	—	—	—
myGMC app ²	○	○	○	○	○	○	○	○	○	○
Smart Trailer Integration	●	●	●	●	—	—	—	—	—	—
Traction Select System with Tow/Haul mode	○	○	○	○	—	—	○	●	—	—
Auto Electric Parking Brake	●	●	●	●	—	—	—	—	—	—
Park Grade Hold Assist	—	●	●	●	—	—	—	—	—	—
Hill Start Assist	●	●	●	●	●	●	○	●	●	●
Diesel Exhaust Brake System	○	○	○	○	—	○	—	—	○	—
Diesel Engine After-Run	—	○	○	○	—	—	—	—	—	—
Trailering mirrors	○	●	●	●	—	—	—	—	—	—
Integrated Trailer Brake Controller	○	○	○	○	○	○	—	—	—	—
Trailer Sway Control	●	●	●	●	●	●	●	●	●	●
Transmission temperature gauge	●	●	●	●	—	●	—	—	—	—
Hitch Guidance ³	○	○	○	—	—	○	○	—	—	—
Rear Vision Camera ³	●	●	●	—	●	●	●	●	●	○
High Definition Surround Vision ³	○	○	○	—	—	—	○	○	—	—
Trailering Hitch Platform	○	●	●	—	●	○	○	○	○	—
7-wire harness with independent fused trailering circuits	●	●	●	○	●	○	○	○	○	○
7-pin and 4-pin connector	○	●	●	—	● (7-pin)	○ (7-pin)	○ (7-pin)	○ (7-pin)	○	—
Up to 15 camera views, including transparent trailer view ⁴	○	○	○	—	—	—	—	—	—	—

¹App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ²Device data connection required. Available on select Apple® and Android devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. ³Read the vehicle Owner's Manual for important feature limitations and information. ⁴Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

FOR MORE INFORMATION ON THESE TECHNOLOGIES, VISIT GMC.COM



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TERMINOLOGY

CURB WEIGHT: The weight of a vehicle with all of the standard and optional equipment and a full tank of fuel, but without any passengers or cargo.

GROSS VEHICLE WEIGHT (GVW): The combined weight of the vehicle and all passengers and cargo.

GROSS VEHICLE WEIGHT RATING (GVWR):
This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The GVW must never exceed the GVWR.

GROSS COMBINED WEIGHT RATING (GCWR):
The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

CARGO WEIGHT: The weight of all items added to the curb weight of the vehicle, including cargo and optional equipment. When towing, cargo weight also includes the trailer tongue or kingpin weight.

MAX PAYLOAD: The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

GROSS AXLE WEIGHT RATING (GAWR): This is the weight that each axle is capable of supporting. The load on each axle must not exceed the GAWR. The GAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

GROSS AXLE WEIGHT (GAW): The total weight placed on a single axle (front or rear).

GROSS TRAILER WEIGHT: The weight of a loaded trailer.

GROSS COMBINED WEIGHT (GCW): The gross vehicle weight plus the loaded trailer weight.

TONGUE (OR HITCH) WEIGHT: The tongue weight is the total amount of trailer weight that is pressing down on the trailer hitch. Keep in mind that the way a trailer is loaded affects the overall tongue weight and will also affect the handling of the tow vehicle when trailering.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

TRAILERING ON THE ROAD


TRAILER HITCH TYPES




HITCH BALL ON STEP BUMPER




HITCH BALL ON DRAW BAR



WEIGHT-DISTRIBUTING HITCH



FIFTH-WHEEL HITCH



GOOSENECK HITCH

SELECTING THE RIGHT HITCH Choosing the right hitch and making the proper electrical connections affect how your vehicle handles, corners and brakes, and allow you to alert other drivers of your intentions. Before selecting a hitch or trailering package, you should be familiar with the weight ratings specific to your GMC vehicle.

WEIGHT-CARRYING HITCH This consists of a hitch ball mounted on a step bumper or draw bar, or a tow eye latched to a pintle hook. Hitch balls are available in a range of sizes. Make sure that the diameter of your hitch ball matches your trailer coupler. Also check that the ball and ball mount meet or exceed the Gross Trailer Weight Rating.

WEIGHT-DISTRIBUTING HITCH This is most often used for heavier trailering. This hitch type more evenly distributes the trailer load by using spring bars to shift some of the hitch weight forward onto the tow vehicle's front axle and rearward to the trailer's axles.

FIFTH-WHEEL HITCH AND GOOSENECK HITCH These are designed for heavy trailering. Located in the bed of the truck, these hitch types are most frequently used with travel trailers, horse trailers and other large trailers.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING ON THE ROAD

TRAILER TYPES



CONVENTIONAL TRAILER While typically used to describe recreational trailers, like campers or boat trailers, conventional trailers generally utilize a ball-type hitch.



FIFTH-WHEEL TRAILER Fifth-wheel trailers can be slightly larger than conventional trailers and offer a wide range of configurations. These trailers are designed specifically for pickups equipped with a fifth-wheel hitch.



GOOSENECK TRAILER Gooseneck trailers place the hitch weight of the trailer over the rear axle of the truck rather than the rear bumper.



VEHICLE COMPARISON




TECHNOLOGY



TERMINOLOGY

TRAILERING INFORMATION LABEL

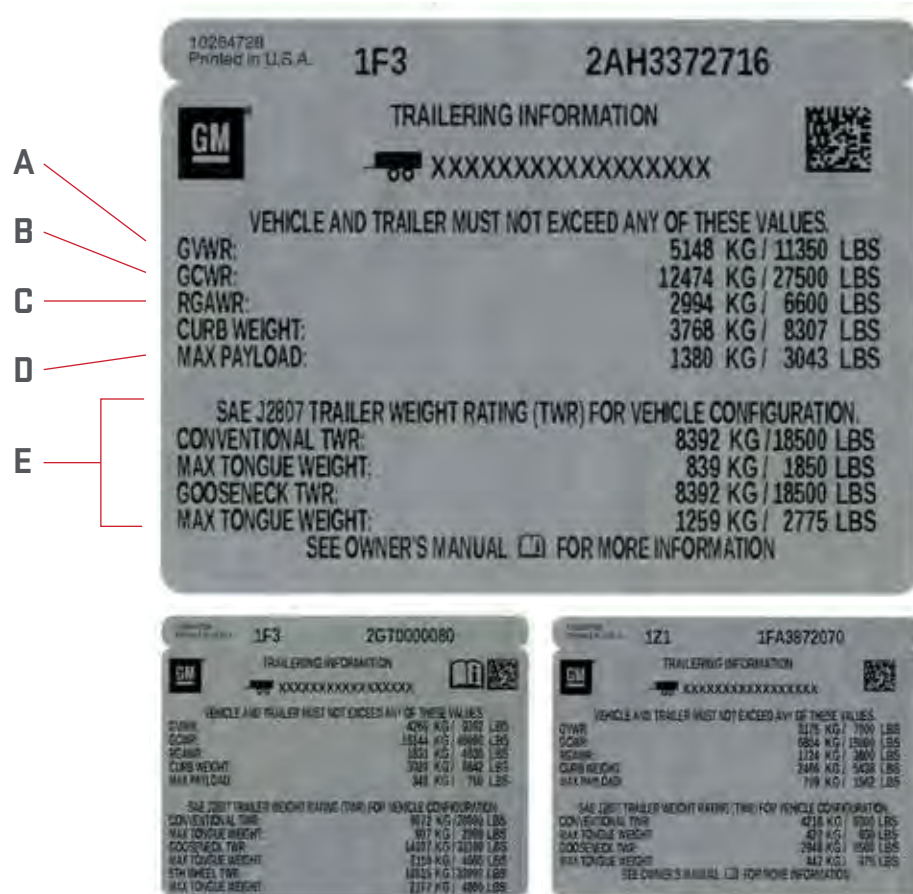

Included on all Sierra 1500 and Sierra Heavy Duty models is a Trailing Information label.

A GVWR = Gross Vehicle Weight Rating

This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The Gross Vehicle Weight must never exceed the GVWR.

B GCWR = Gross Combined Weight Rating

The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

C RGAWR = Rear Gross Axle Weight Rating

This is the weight that the rear axle is capable of supporting. The load on the axle must not exceed the RGAWR. The RGAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

D Max Payload

The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

E TWR = Trailer Weight Rating

This section of the label provides the ratings for your vehicle's specific configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

LIVE LIKE A PRO

TRAILERING WITH YOUR GMC GMC vehicles are built to be strong and durable to handle the demands of trailering. For available trailering-related equipment, talk to your dealer. You'll need a hitch, of course, and a wide selection of hitch types is available, either as factory equipment or from your dealer. In addition, if you plan to tow frequently, you should consider equipping your GMC vehicle with an available Trailering Package. See your GMC dealer or gmc.com for model-specific package details and equipment. Please carefully review your GMC Owner's Manual for important safety information about trailering with your vehicle.

A WORD ABOUT THIS GUIDE We have tried to make this guide comprehensive and factual. We reserve the right, however, to make changes at any time and without notice, in prices, colors, materials, equipment, specifications, models and availability. Information may have been updated since the time of publication. Please check with your GMC sales professional for complete details. GMC reserves the right to lengthen or shorten the model year for any product for any reason, or to start and end model years at different times. GMC vehicles are equipped with engines produced by different operating units of General Motors, its subsidiaries or suppliers to General Motors worldwide. All competitive claims are based on the latest information available at the time of publication.

©2020 General Motors. All rights reserved. GM, the GM logo, GMC, and the slogans, emblems, vehicle model names, vehicle body designs and other marks appearing in this guide are the trademarks and/or service marks of General Motors, its subsidiaries, affiliates and licensors.



GMC.COM